12~24VCD

SPW13 series

9 Inch Exterior Scene Light

ECE R10




FEATURES

- Curved design to maximize coverage with streamline aesthetics.
- Over 1730 lumen output; Luminous intensity ≧ 820 lux at 1 meter.
- Certified ECE R10 and CISPR 25 Class 3.
- 12~24V wide range input.
- Reverse polarity protection.
- Available in black, white, yellow, or red base.
- Die-cast aluminum base for efficient heat dissipation and high LED durability.
- Weatherproof and vibration resistant design for external use.

SPECIFICATIONS

Compliance: ECE R10, CISPR 25 Class 3, IPX7
Operating Voltage: 12~24VCD
Beam Type: Flood
LED Element: High Power LED x 6 pcs
Raw Lumen: 1730 lm
Effective Lumen: 1460 lm
Max. Current: 1.12A @12VCD / 0.56A @24VCD
Max. Power: 13.44 Watt
Wires: Red-VCD: 21cm (20AWG)
Black-GND : 21cm (20AWG)
Fuse Rating: 1.5A
LED Colour: White (6000K)
Lens Colour: Clear
Storage Temp. (°C): -40° ~ +75°
Working Temp. (°C): -40° ~ +60°
Weight : 410g

DIMENSIONS

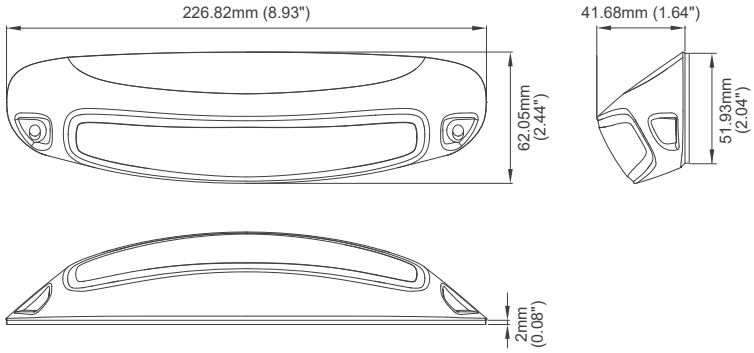

PART NO.

SPW13-0xy3W-000

x : refer to R10 label


- 0 = w/o R10 Label
- 1 = w/ R10 Label

y : refer to base colour

- 0 = Black Base
- 1 = White Base
- 3 = Yellow Base *
- 4 = Red Base (RAL3000) *

* Special order and please contact to your sales representatives.

ILLUMINANCE PATTERN

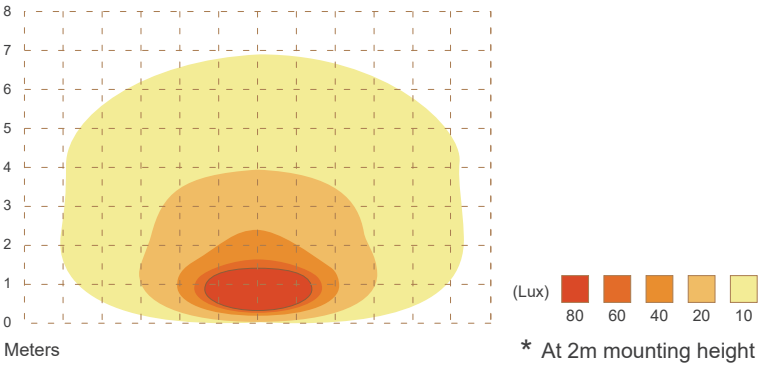

* At 2m mounting height